



CONO



IP 65
Class I

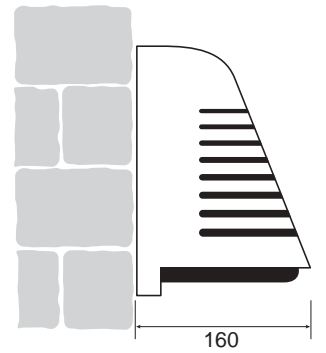



I

Corpo
Alluminio

Diffusore
Policarbonato stabilizzato all'ultravioletto.
Resistenza all'urto 20 Joule - IK 10.
GWT 850 °C.



Verniciatura
Poliestere

GB

Body
Aluminium

Diffuser
U.V. stabilized polycarbonate.
Shockproof 20 Joule - IK 10.
GWT 850 °C.

Paint
Polyester

| CONO | | | | | |
|---|---------------------|-------|------|---|---|
| Lamp | Data Sheet/Dati | Lumen | Code | Colour | Diffuser |
|  | Max 60W - E27 - 1AA | 600 | 3910 | <p>02 nero/black</p> <p>01 bianco/white</p> | <p>60 trasparente transparent</p> |
|  | 13W - G24d-1 - FSQ | 900 | 3911 | <p>09 alluminio/aluminium</p> <p>07 verde/green</p> | |