

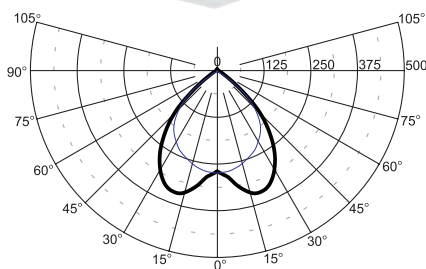
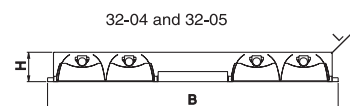



Recessed luminaires - T5 lamps



32-023/414/CC



32-04 and 32-05

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003, gray RAL 9006

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast, dimmable ballast on request; the luminaires are offered also in emergency version

Mounting:

- ceiling systems M600 - universal mounting (32-02, 32-04)
- ceiling systems M625 - universal mounting (32-03, 32-05)
- mounting in plaster ceilings (32-03, 32-05)

Accessories: (must be ordered separately) (four pieces for one luminaire needed)

- holders for mounting in panel ceiling systems 99-298 (4pcs)
- holders for mounting in plaster ceilings 99-299 (4pcs)

Application:

- computer labs
- lecture halls
- large and small offices
- stairways and halls

Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Module	Hole cut out (mm)	kg
32-023/214/C ²	2x14W	B, C, D, J	T5 lamp	G5	595x295x60	575x218	M 600	3,0
32-023/228/C ²	2x28W	B, C, D, J	T5 lamp	G5	1195x295x60	1175x218	M 600	5,8
32-023/314/C ²	3x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-023/328/C ²	3x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
32-023/414/C ²	4x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-023/428/C ²	4x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
32-033/214/C ²	2x14W	B, C, D, J	T5 lamp	G5	620x308x60	575x218	M 625	3,0
32-033/228/C ²	2x28W	B, C, D, J	T5 lamp	G5	1245x308x60	1175x218	M 625	5,8
32-033/314/C ²	3x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-033/328/C ²	3x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5
32-033/414/C ²	4x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-033/428/C ²	4x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5
32-043/414/C ²	4x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-043/428/C ²	4x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
32-053/414/C ²	4x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-053/428/C ²	4x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5



If requested, luminaires with T5 lamps (24W, 54W) can be specially ordered.

- ² - B (highly polished parabolic louvre, 60°) - C (matted parabolic louvre, 60°)
- D (highly polished Christmas tree louvre)
- J (matted Christmas tree louvre)





Recessed luminaires

- T5 lamps
- color stripes

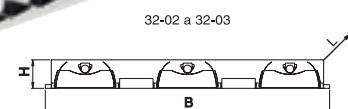

32-04 a 32-05



Material:

- body: a steel sheet finished by powder technology varnish
- color: white RAL 9003, gray RAL 9006
- louvre: highly polished or matted parabolic louvre made of a pure aluminium sheet MIRO, polished or matted Christmas tree louvre
- cover: color stripes made of PMMA with foil white perforated stripe made of steel sheet

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast, dimmable ballast on request; the luminaires are offer also in emergency version

Mounting:





















- in ceiling systems M600 - universal mounting (32-02, 32-04)
- in ceiling systems M625 - universal mounting (32-03, 32-05)
- in plaster ceilings


Accessories: (must be ordered separately) (four pieces for one luminaire needed)

- holders for mounting in panel ceiling systems 99-298 (4pcs)
- holders for mounting in plaster ceilings 99-299 (4pcs)


Application:


computer labs large and small offices
lecture halls stairways and halls

	Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Module	Hole cut out (mm)	kg
 (0) opaline	32-023/314/C 	3x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
	32-023/328/C 	3x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
	32-023/414/C 	4x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
	32-023/428/C 	4x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
 (1) blue	32-033/314/C 	3x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
	32-033/328/C 	3x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5
	32-033/414/C 	4x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
	32-033/428/C 	4x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5
 (2) pink	32-043/214/C 	2x14W	B, C, D, J	T5 lamp	G5	595x295x60	575x275	M 600	3,0
	32-043/228/C 	2x28W	B, C, D, J	T5 lamp	G5	1195x295x60	1175x275	M 600	5,8
	32-043/414/C 	4x14W	B, C, D, J	T5 lamp	G5	595x595x60	575x575	M 600	5,0
	32-043/428/C 	4x28W	B, C, D, J	T5 lamp	G5	1195x595x60	1175x575	M 600	8,5
 (3) gray	32-053/214/C 	2x14W	B, C, D, J	T5 lamp	G5	620x308x60	575x275	M 625	3,0
	32-053/228/C 	2x28W	B, C, D, J	T5 lamp	G5	1245x308x60	1175x275	M 625	5,8
	32-053/414/C 	4x14W	B, C, D, J	T5 lamp	G5	620x620x60	575x575	M 625	5,0
	32-053/428/C 	4x28W	B, C, D, J	T5 lamp	G5	1245x620x60	1175x575	M 625	8,5



If requested, luminaires with T5 lamps (24W, 54W) can be specially ordered.

-  - B (highly polished parabolic louvre, 60°) - C (matted parabolic louvre, 60°)
- D (highly polished Christmas tree louvre)
- J (matted Christmas tree louvre)

-  - coloured stripes (0-opaline, 1-blue, 2-pink, 3-grey)
- white perforated stripe (P)



Recessed luminaires - T5 lamps



Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished or matted parabolic louvre made of a pure aluminium sheet MIRO

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast, dimmable ballast on request; the luminaires are offered also in emergency version

Mounting:

- ceiling systems M600 - universal mounting (32-06)
- ceiling systems M625 - universal mounting (32-07)
- mounting in plaster ceilings (32-07)

Accessories: (must be ordered separately)

(four pieces for one luminaire needed)

- holders for mounting in panel ceiling systems 99-298 (4pcs)
- holders for mounting in plaster ceilings 99-299 (4pcs)

Application:

computer labs
large and small offices
lecture halls
stairways and halls

Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Module	Hole cut out (mm)	kg
32-063/128/C ²	1x28W	B, C	T5 lamp	G5	1195x135x60	1175x120	M 600	4,1
32-063/228/C ²	2x28W	B, C	T5 lamp	G5	1195x295x60	1175x218	M 600	5,8
32-063/314/C ²	3x14W	B, C	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-063/414/C ²	4x14W	B, C	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-073/128/C ²	1x28W	B, C	T5 lamp	G5	1245x150x60	1175x120	M 625	4,1
32-073/228/C ²	2x28W	B, C	T5 lamp	G5	1245x308x60	1175x218	M 625	5,8
32-073/314/C ²	3x14W	B, C	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-073/414/C ²	4x14W	B, C	T5 lamp	G5	620x620x60	575x575	M 625	5,0

If requested, luminaires with T5 lamps (24W, 54W) can be specially ordered.

- ² - B (highly polished parabolic louvre)
- C (matted parabolic louvre)

Recessed luminaires - T5 lamps



Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished parabolic louvre

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast

Mounting:

- ceiling systems M600 - universal mounting (32-08)
- ceiling systems M625 - universal mounting (32-09)
- mounting in plaster ceilings (32-09)

Accessories: (must be ordered separately)

(four pieces for one luminaire needed)

- holders for mounting in panel ceiling systems 99-298 (4pcs)
- holders for mounting in plaster ceilings 99-299 (4pcs)

Application:

computer labs
large and small offices
lecture halls
stairways and halls

Code	Power	Lamp	Cap	LxBxH (mm)	Hole cut out (mm)	Module	kg
32-083/314/CBL	3x14W	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-083/414/CBL	4x14W	T5 lamp	G5	595x595x60	575x575	M 600	5,0
32-093/314/CBL	3x14W	T5 lamp	G5	620x620x60	575x575	M 625	5,0
32-093/414/CBL	4x14W	T5 lamp	G5	620x620x60	575x575	M 625	5,0