

Recessed luminaires with IP54

- panel ceilings M600
- inlay mounting



Material:

- body – a steel sheet finished by powder technology varnishing
- color – white RAL 9003
- cover – prismatic



Degree of protection: IP 54

Rated voltage: 230V/50Hz

Control gear: standard or electronic ballast, dimmable ballast on request; the luminaires are offered also in emergency version

Mounting: ceiling systems M600, inlay mounting


Application: hospitals, laboratories, areas demanding high hygienic standards, areas with high rate of dustness and humidity, operating theaters

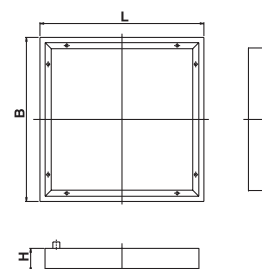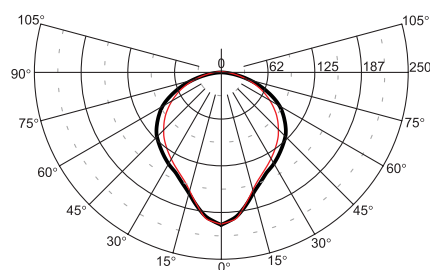

Code	Power	Lamp	Cap	LxBxH (mm)	Module	kg
35-023/236/□X	2x36W	T8 lamp	G13	1197x297x110	M600	4,7
35-023/418/□X	4x18W	T8 lamp	G13	595x595x122	M600	8,2
35-024/336/□X	3x36W	compact fl. lamp	2G11	595x595x122	M600	7,8
35-024/355/CX	3x55W	compact fl. lamp	2G11	595x595x122	M600	7,9

□ - B (standard ballast) - C (electronic ballast)

Recessed luminaires with IP54 - universal mounting

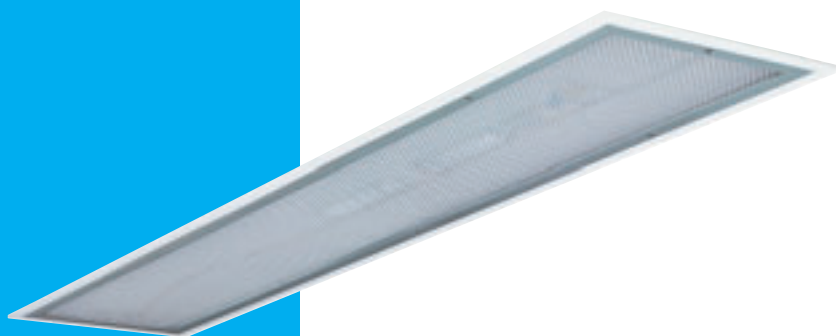

Material:

- body – a steel sheet finished by powder technology varnishing
- color – white RAL 9003
- cover – prismatic

Degree of protection: IP 54


Rated voltage: 230V/50Hz

Control gear: standard or electronic ballast, dimmable ballast on request; the luminaires are offered also in emergency version


Mounting: universal mounting in panel ceilings M625 and in plaster ceilings

Accessories: steel holders (are components of the luminaire)

Application: hospitals, laboratories, areas demanding high hygienic standard, areas with high rate of dustness and humidity, operating theaters

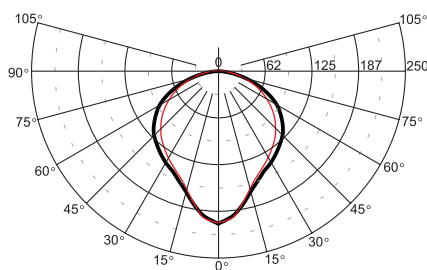

35-034/355/CX

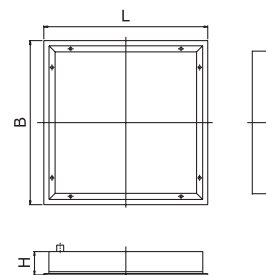

Code	Power	Lamp	Cap	LxBxH (mm)	Hole cut out (mm)	Module	kg
35-033/136/□X	1x36W	T8 lamp	G13	1247x311x95	1215x297	M625	4,4
35-033/158/□X	1x58W	T8 lamp	G13	1547x311x95	1515x297	M625	4,7
35-033/236/□X	2x36W	T8 lamp	G13	1247x311x95	1215x297	M625	4,9
35-033/258/□X	2x58W	T8 lamp	G13	1547x311x95	1515x297	M625	5,4
35-033/418/□X	4x18W	T8 lamp	G13	622x622x95	591x608	M625	8,4
35-034/336/□X	3x36W	compact fl. lamp	2G11	622x622x95	591x608	M625	7,9
35-034/355/CX	3x55W	compact fl. lamp	2G11	622x622x95	591x608	M625	8,1

□ - B (standard ballast) - C (electronic ballast)